
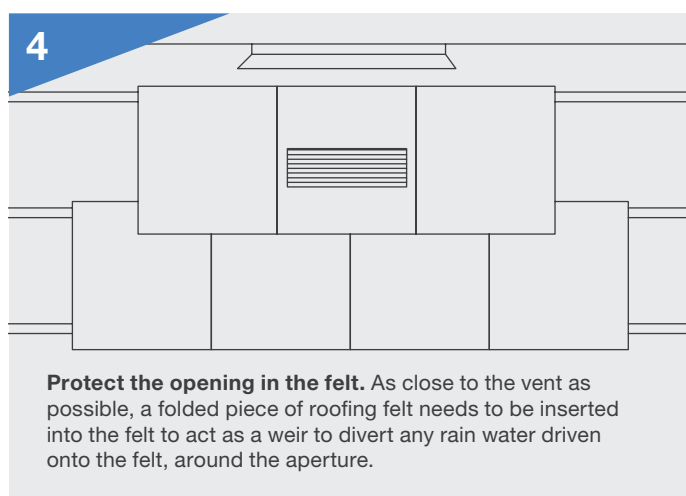
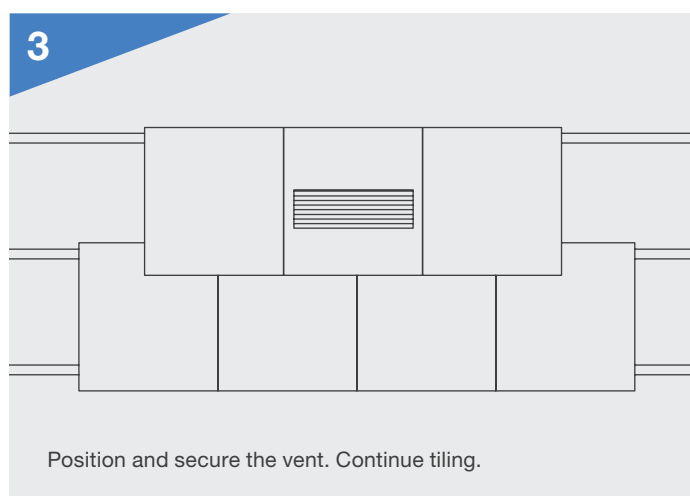
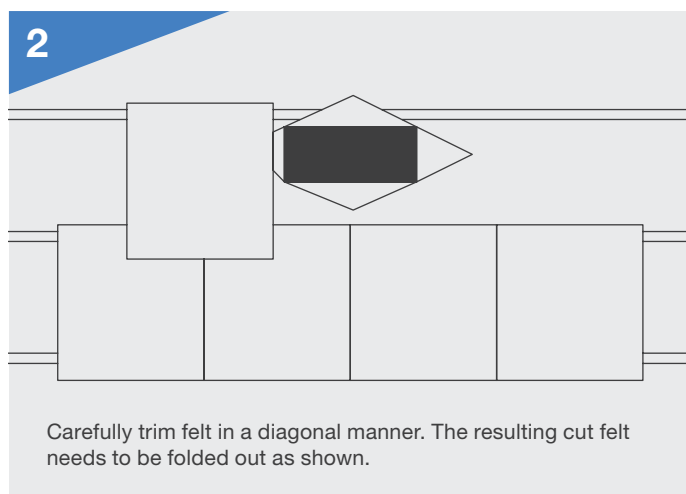


Bespoke Vents

Fixing Instructions

Important Note: When used for extracting from bathroom extraction units, or when the tile vent is used as a soil vent pipe terminal, ensure the flexible pipe is fully insulated. It is recommended the distance from the vent tile to the source of extraction is kept to a minimum. **Minimum Pitch: 22.5 degrees. Maximum Lap: 90mm**

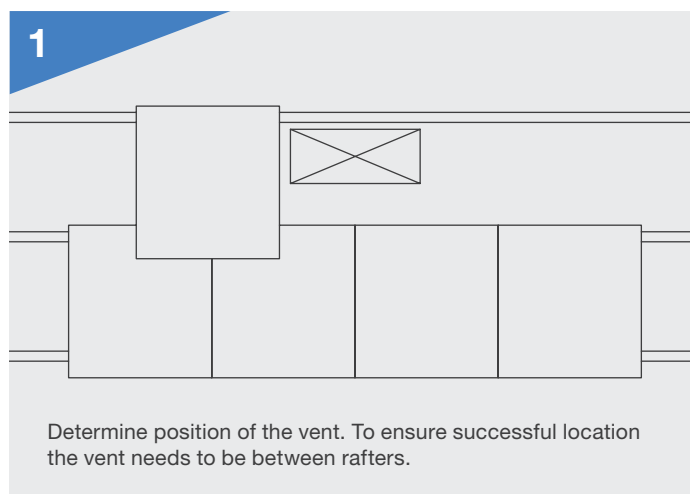

All products are covered by our 15 year Durability Warranty terms and conditions can be found on our website.



All plastic products are made in UK.